



All dimensions are in inches [millimeters]

MOUNTING HOLE DISTANCE: 5.250 [133.4]

MOUNTING HOLE OPENINGS: .400-.408 [10.16-10.36]

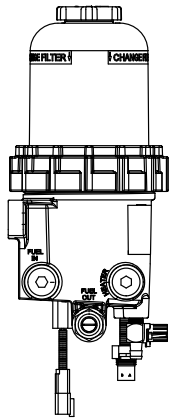


LEFT




5.80
[147.3]
MAX.

BOTTOM

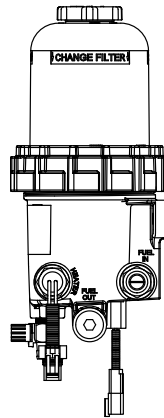

RIGHT

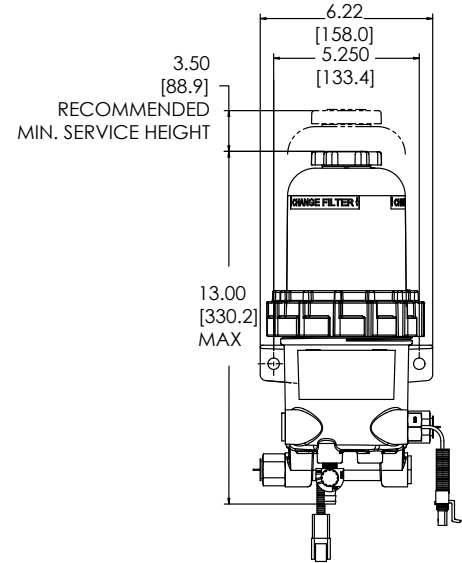

FRONT

SPECIFICATIONS

Height, Overall	13.00 in. (330.2 mm)
Depth, Overall	5.80 in. (147.3 mm)
Width, Maximum	6.30 in. (160.0 mm)
Mount Bracket Centers	5.25 in. (133.4 mm)
Weight, Dry	7.7-8.5 lbs.
Filter Service Clearance, Minimum	3.5 in. (88.9 mm)
Fuel Flow, Maximum	60 gph
Electric Pre-heater	12VDC 195W or 12VDC 155W
Overnight heater	120VAC, 75 W, .65 A

PORT INTERFACE

Fuel In Connection	3/8"-18 NPTF or 1/2"-14 NPTF
Fuel Out Connection	3/8"-18 NPTF or 1/2"-14 NPTF

FILTRATION PERFORMANCE AT 60 GPH

Micron	7
Coarse Water Removal (%)	99.6
Emulsified water removal (%)	98.9
Dirt holding capacity (grams)	118

RESTRICTION VS. FLOW

